


AMERICAN HOIST & DERRICK CO.
ST. PAUL, MINNESOTA 55107

GENERAL DIMENSIO
MODEL 595C
500 SERIES CRANES

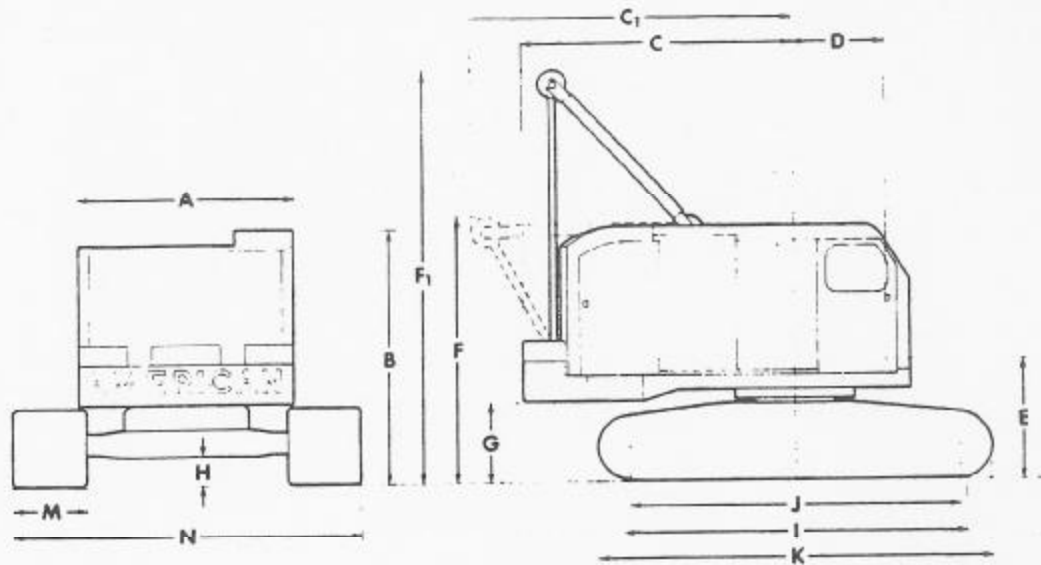

GENERAL DIMENSIONS

A.	Width of cab	-----	9'-0" (2.74m)
B.	Height over cab	-----	10'-8-3/4" (3.27m)
C.	Tailswing	-----	10'-9-1/2" (3.29m)
D.	Center of pivot to center crane boom foot	-----	3'-7-3/4" (1.11m)
E.	Ground to center crane boom foot	-----	5'-1-7/8" (1.57m)
F.	Height over retractable A-Frame (Retracted)	-----	11'-1-3/4" (3.40m)
F1.	Height over retractable A-Frame (Raised)	-----	16'-9-3/4" (5.12m)
G.	Ground to bottom of counterweight	-----	3'-5" (1.04m)
H.	Minimum clearance under base	-----	1'-2-1/4" (36.20cm)
I.	Crawler bearing length	-----	12'-11" (3.94m)
J.	Center to center crawler tumbler	-----	12'-0" (3.66m)
K.	Overall length of crawlers	-----	14'-7" (4.44m)
M.	Tread width Standard	-----	32" (81.28cm)
	Optional	-----	28" (71.12cm) & 36" (91.44cm)
N.	Overall width over crawlers (Working)		
	28" (71.12cm) Shoes	-----	11'-2" (3.40m)
	32" (81.28cm) Shoes	-----	11'-6" (3.51m)
	36" (91.44cm) Shoes	-----	11'-10" (3.61m)
N1.	Overall width over crawlers (Shipping)		
	28" (71.12cm) Shoes	-----	10'-8" (3.25m)
	32" (81.28cm) Shoes	-----	11'-0" (3.35m)
	36" (91.44cm) Shoes	-----	11'-4" (3.45m)