



GENERAL SPECIFICATIONS:

CONVEYOR LENGTH: 74'-0"
 TOWING WIDTH: 10'-0"
 MAIN FRAME: 48" WIDE X 30" DEEP
 BELT WIDTH: 36"
 DIESEL HYDRAULIC POWER UNIT
 IDLERS: 35' CEMA C SEALED
 HEAD PULLEY: 12 X 38 LAGGED
 TAIL PULLEY: 12 X 38 CROWNED
 BEARINGS: 2-1/2" PILLOW BLOCK
 BELT SPEED: NOMINAL 300 ft/min
 LEGS: TELESCOPIC SUPPORT FOR ADJUSTABLE ANGLE & HEIGHT
 HOPPER: RADIAL FEED BOOTH
 AXLE: WITH WHEELS FOR RADIAL MOVEMENT
 PIVOT POINT AND BASE PLATE UNDER FEED END
 WEIGHT: 16,000 LBS

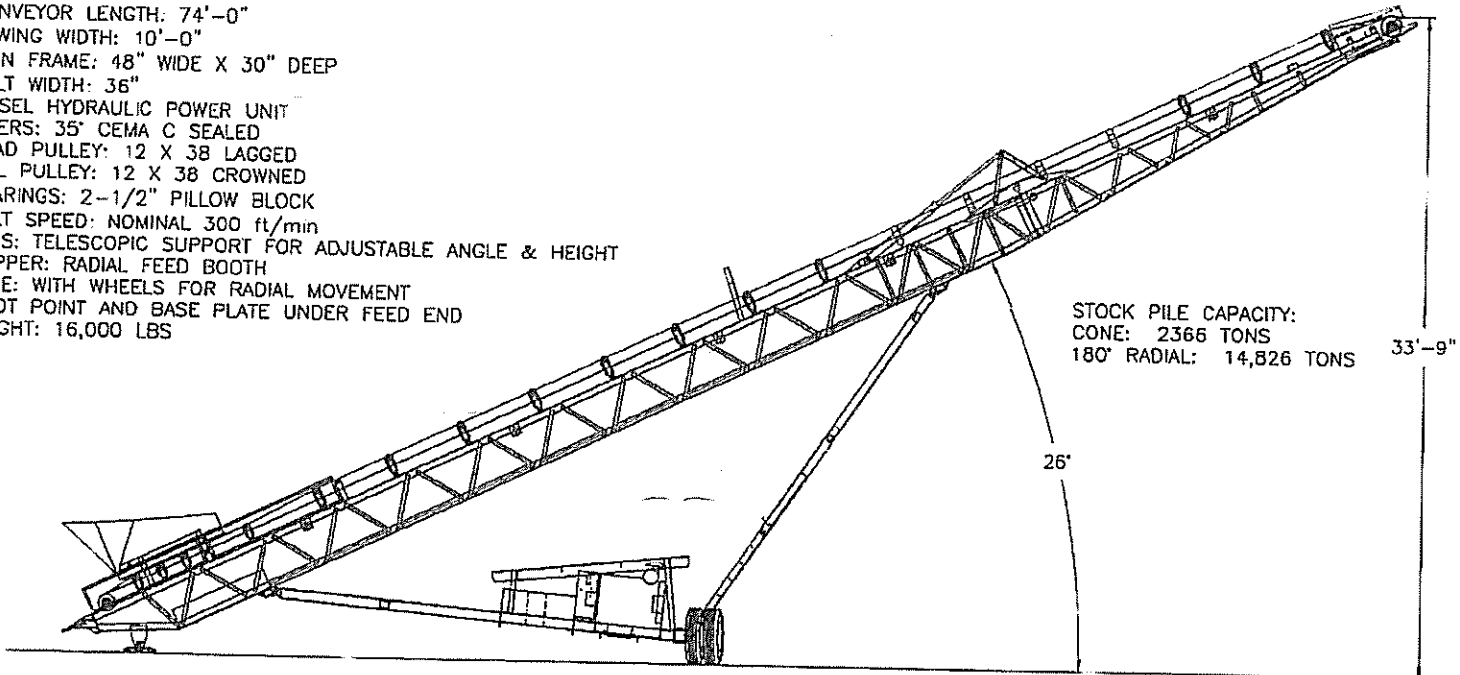

STOCK PILE CAPACITY:
 CONE: 2366 TONS
 180° RADIAL: 14,826 TONS

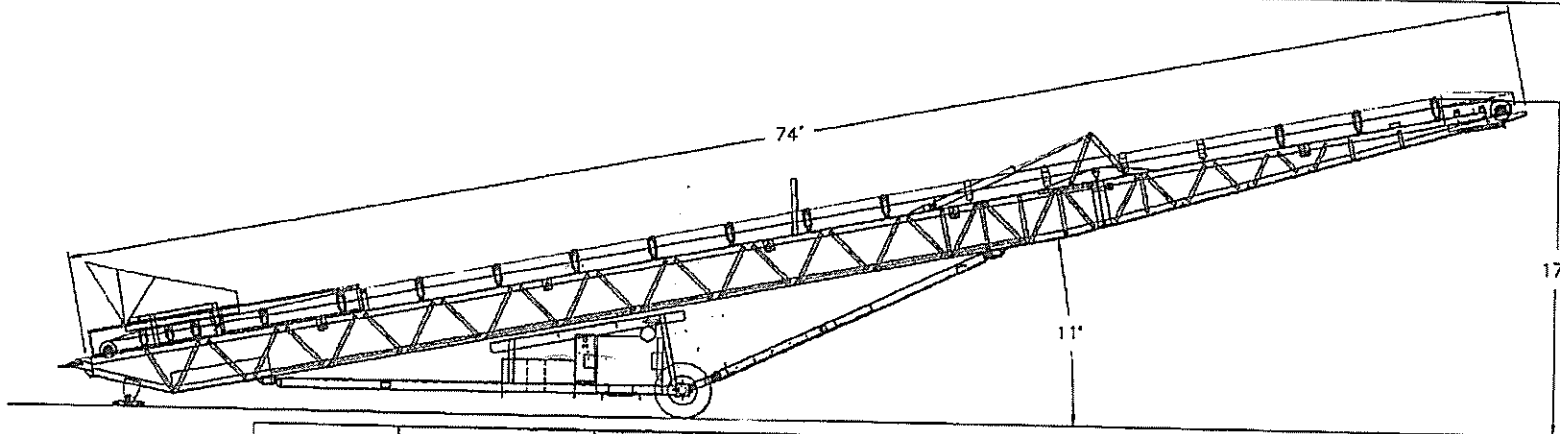

		DIMENSIONS			
UNITS	TOLERANCE	± 1/32	± .03	± .010	± .2"
NEXT ASSEMBLY					
APPLICATOR					
FINISH					
MATERIAL					
REVISION DATA	BY	DATE	LETTER	DRAWN BY	DATE

MGL ENGINEERS
 LACELAND, FL
 388-885-8828

FILE: GENERAL SPECIFICATIONS
 MINIMUM & MAXIMUM
 WORKING POSITIONS

DRAWING NO: **7436 Radial Stacker**

NO. SHEETS: 1 of 1
 SCALE: FULL
 REV: --

